



Sump Pump Comparison

The Cast Iron Sump Pump is made with a rugged construction, ensuring your pump will last under the harshest conditions. It also uses less amps, meaning it is considerably less expensive for the homeowner to operate - saving you money! Compare specs with Zoeller's M53.



Model No.	CIS-33V	M53
Horsepower	1/3 HP	1/3 HP
Housing Material	Cast iron	Cast iron
Solids	1/2"	1/2"
GPM @ 10 feet	53 GPM	34 GPM
GPH @ 10 feet	3,200 GPH	2,040 GPH
Voltage	115 VAC	115 VAC
Running Amps	5.0 Amps	9.7 Amps
Power Cord Length	10 feet	9 feet
Warranty	3 years (from date of installation)	3 years (from date of manufacturer)

Flow Chart

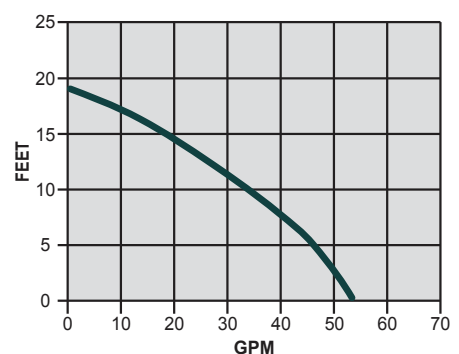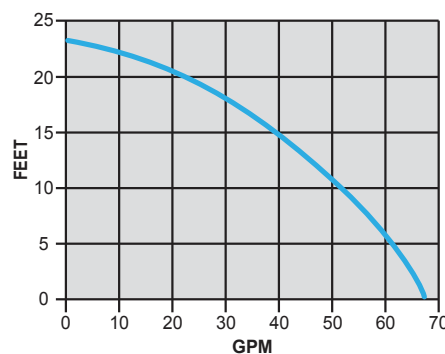

By **GLENTRONICS** INC

distrocan.ca

The Cast Iron Sump Pump



Features

- Cast-iron sump/effluent pump
- Energy-efficient permanent split capacitor (PSC) motor
- Includes built-in vertical switch
- Cast-iron vortex impeller
- Upper and lower ball bearings
- Carbon ceramic plus Buna N shaft seals
- Thermally protected
- Stainless-steel fasteners
- Pumps solids up to ½ inch
- Removable strainer
- 10-foot power cord (20-foot option available)
- 3-year limited warranty

Specifications

Model No.	CIS-33V	CIS-50V
Motor HP	⅓ HP	½ HP
GPM @ 10 ft	53	64
GPH @ 10 ft	3,200	3,840
Discharge	1.5 in/3.8 cm	1.5 in/3.8 cm
Amps @ 10 ft	5	5.5
Weight	21.1 lbs/9.6 kg	22.1 lbs/10 kg
Width	9 in/22.9 cm	9 in/22.9 cm
Depth	6.5 in/16.5 cm	6.5 in/16.5 cm
Height	11.75 in/29.8 cm	11.75 in/29.8 cm
Activation Level	7.125 in/18 cm	7.125 in/18 cm
Deactivation Level	2.25 in/5.7 cm	2.25 in/5.7 cm

Flow Chart

